



Vesilukoputki DIN16282

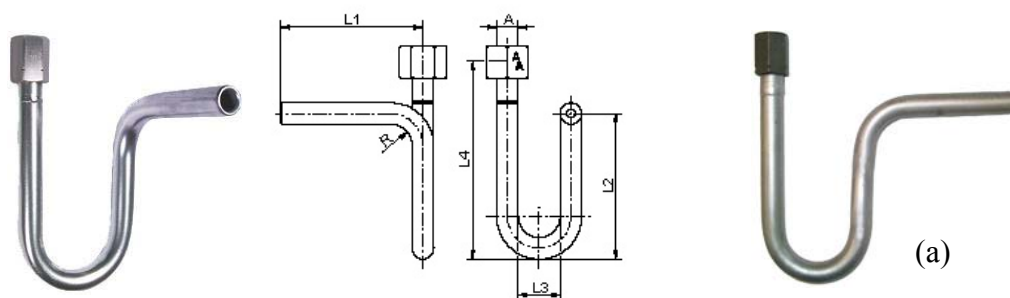

Vesilukkoputki, DIN16282-B, hitsattava kiristysmuhvilla, U-malli, materiaali: St 35.8 teräs, 1.4571, 13CrMo44. Maks. 100bar 120°C, 80bar 300°C, 63bar 400°C ennen vesilukkoputkea.

tuotekoodi	Materiaali	U-Form	DIN	Form	L1/mm	L2/mm	L3/mm	L4/mm	A
167230	St 35.8 teräs	U-Form	16282	B	145	155	56	200	R $\frac{1}{2}$ "
167255	St 35.8 teräs	U-Form(a)	16282	B	221	155	56	200	R $\frac{1}{2}$ "
167231	1.4571	U-Form	16282	B	145	155	56	200	R $\frac{1}{2}$ "
167256	1.4571	U-Form(a)	16282	B	221	155	56	200	R $\frac{1}{2}$ "
167232	13CrMo44	U-Form	16282	B	145	155	56	200	R $\frac{1}{2}$ "
167257	13CrMo44	U-Form(a)	16282	B	221	155	56	200	R $\frac{1}{2}$ "

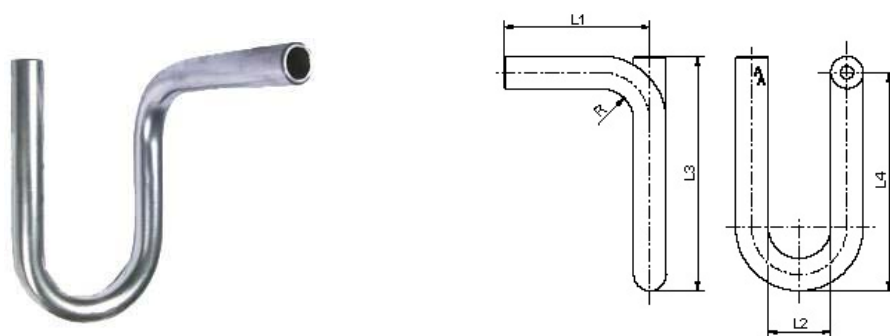

Vesilukkoputki, DIN16282-F, hitsattava, U-malli, materiaali: St 35.8 teräs, 1.4571, 13CrMo44. Maks. 100bar 120°C, 80bar 300°C, 63bar 400°C ennen vesilukkoputkea.

tuotekoodi	Materiaali	U-Form	DIN	Form	L1/mm	L2/mm	L3/mm	L4/mm	A
167280	St 35.8 teräs	U-Form	16282	F	145	56	165	155	R $\frac{1}{2}$ "
167281	1.4571	U-Form	16282	F	145	56	165	155	R $\frac{1}{2}$ "
167282	13CrMo44	U-Form	16282	F	145	56	165	155	R $\frac{1}{2}$ "